TO-U Global

连接适合的资源，让复杂项目更具交付确定性

桐曜国际贸易（杭州）有限公司

地址:浙江省杭州市西湖区教工路198号

联系人:钟先生

联系电话:+86 139 6729 0907

电子邮件:conradchung@to-uglobal.com



TO-U GLOBAL 桐曜国际

全球资源网络 · 整合解决方案

大家居 · 跨行业资源协同

酒店 | 住宅 | 商业空间

公司简介

全球资源网络 · 整合解决方案

TO-U GLOBAL 桐曜国际，是一个持续扩展的全球资源网络。我们连接制造商、品牌与产品、技术、物流及本地合作伙伴，将分散于不同产业与地域的专业资源进行匹配、整合与协同，转化为可落地、可交付的解决方案。

建筑装修，是 TO-U 资源整合能力最早验证、也是目前最成熟的应用场景之一。围绕酒店、住宅及商业空间，我们整合家具、建材、五金、门窗、设备、灯具、卫浴与安防等多元资源，并贯通设计、采购、生产、品控、物流与安装等关键环节，我们从设计开始介入为客户提供从资源匹配、产品选型到项目交付的完整支持。

我们不局限于单一产品，也不以单一行业定义自己。TO-U 的核心价值，在于连接真正适合客户需求的资源，整合不同专业与供应链环节，减少沟通与协同成本，优化采购结构，让复杂的需求变得更清晰，让复杂的项目更具交付确定性。

从内装出发，我们持续将资源网络延伸至出行、能源、智能、医疗等领域。一个资源，可以连接更多行业；多个资源，可以共同构成一个解决方案。



所见有限 · 所能无限

本画册仅呈现 TO–U GLOBAL 家居与内装产品体系中的部分精选产品。依托全球供应链网络，我们连接全球制造商、品牌及专业供应商，持续拓展多品类产品与专业资源。

您的需求，决定我们的产品边界。



从标准产品到定制产品，从单一品类到整体空间配套，我们根据客户需求进行全球资源匹配与供应链整合。接更多行业；多个资源，可以共同构成一个解决方案。

第一章

整体解决方案

Overall solution

—— 全屋定制系统 ——

全球资源连接 · 产品整合 · 定制生产 · 质量控制 · 国际物流 · 本地交付

从全球资源中寻找更合适的产品，从供应链中创造更高效的解决方案。

桐曜国际 依托全球供应链资源，连接制造商、品牌与专业合作伙伴，将不同地区、不同品类的优质产品与生产能力进行整合，为客户提供从需求分析、产品选配、定制生产到物流交付的整体解决方案。

我们不局限于单一产品或单一供应商，而是根据项目需求，在全球范围内匹配合适的产品、材料与供应链资源，以更灵活的产品组合、更高效的供应链协同，为不同空间提供从产品到整体落地的解决方案。



全屋定制系统

不止于单品，而是空间的整体交响。

从设计到落地，统一色彩与工艺，成就极致和谐的空间美学。





木的温润、石的沉静、光影的游走，

在同一套语言里彼此唱和。

客厅的柜、书房的书架、厨房的台面，

看似各自独立，实则同气连枝 ——

美，贵在浑然一体。



酒店空间

针对客房、餐饮、公区及其他酒店场景，整合家具、地面、木作及内装产品，通过全球供应链协同，为项目提供统一的产品配置与供应支持。

客房


家具配置

餐饮

内装产品

公区

统一供应

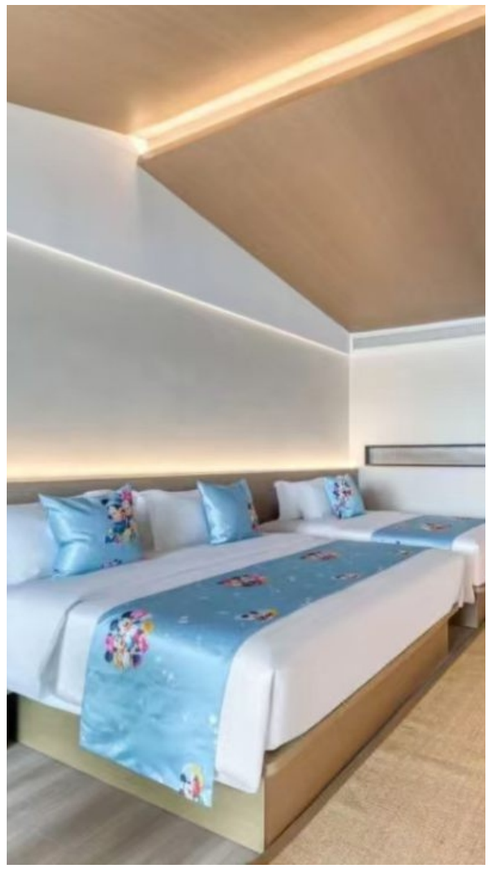





商业空间

面向办公、零售、餐饮及其他商业场景，根据品牌定位与空间需求，整合多品类产品与供应链资源，实现从设计配套、产品供应到项目交付的协同。





办公



零售




餐饮

多品类整合 | 品牌定位适配 | 全链路协同


家居住宅

围绕居住需求与空间设计，整合家具、地面、墙面、木作及定制产品资源，提供从单品配置到整体空间配套的解决方案。


家具




地面



墙面



木作与定制









居住需求|空间设计|定制产品|整体解决方案

第二章

质感基础

Texture foundation


——地面系统——

纯粹基底，坚韧内核

——零醛添加，防水耐造。以原生材质守护空间的安全与纯粹。



酒店项目用商用级SPC地板

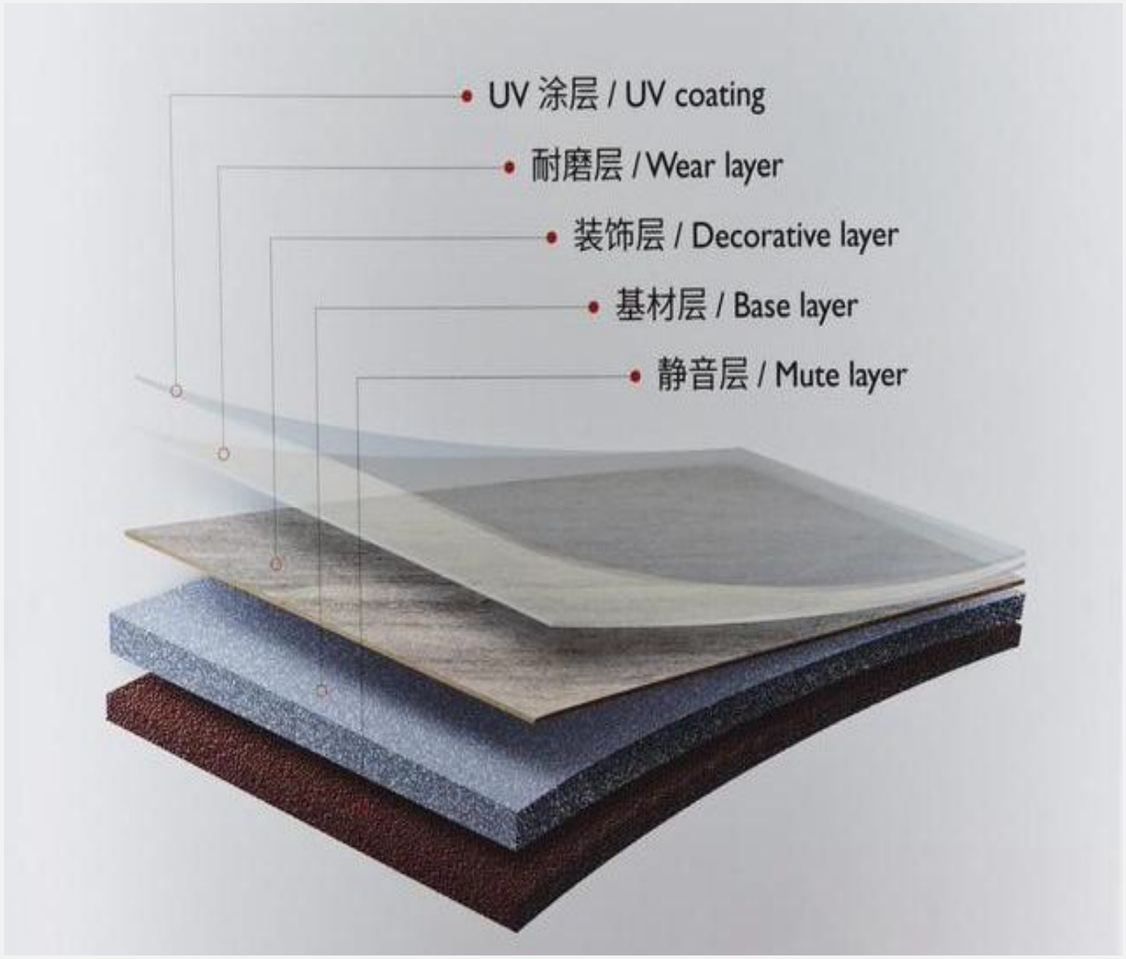

- ☑ 精选**100% 全新原料**
- ☑ 生产过程零甲醛添加
- ☑ 有效抑制细菌滋生
- ☑ 不含重金属、无辐射
- ☑ 防滑性能优异，使用更安全
- ☑ 阻燃防火，无毒无害
- ☑ 防水防潮、防霉抗潮
- ☑ 高耐磨性能，适配高流量高频通行场景
- ☑ 花色款式丰富，覆盖多类应用场景

酒店项目用商用级SPC地板

Unilin授权锁扣系统

节约安装工时，降低施工成本

厚度

4-8mm，耐磨层多规格可选

100% 全新原料

零甲醛



认证

FloorScore、CE、REACH

满足酒店项目标准

防水阻燃


高耐磨，适用于高人流区域

支持配色定制

快速样品服务，适用于家具与装饰品招标


- **厚度：4毫米–8毫米**
- **耐磨层：0.3毫米 / 0.5毫米 / 0.7毫米**
- **卡扣系统：Unilin授权卡扣锁**
- **适用场景：客房 / 楼道 / 大堂 / 餐厅**

SPC地板分类








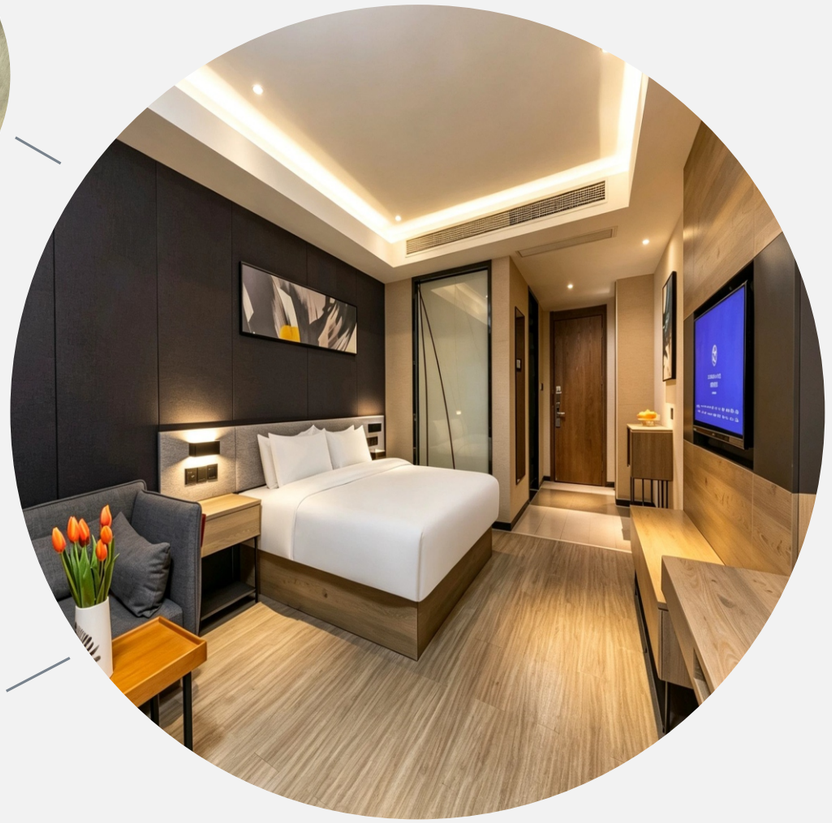



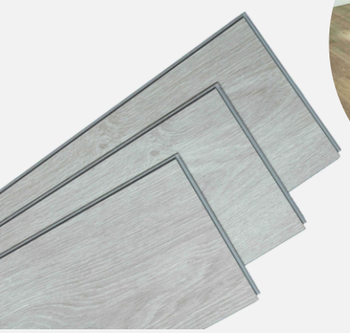

木纹系列		
基材 + 耐磨层厚度	4.0-8.0mm	
总厚度	5.0-9.5mm	
尺寸 (可定制)	英尺	mm
	48.03*7.09	1220*180
	48.03*5.91	1220*150
	60.00*8.98	1524*228
静音垫	IXPE|1.0mm,1.5mm	
耐磨层	0.3mm / 0.5mm / 0.7mm	
SPC 锁扣系统	Unilin Click	

SPC地板分类

人字拼系列		
基材 + 耐磨层厚度	4.5-7.0mm	
总厚度	5.5-8.5mm	
尺寸 (可定制)	英尺	mm
	23.6*4.7	600*120
静音垫	IXPE|1.0mm,1.5mm	
SPC 锁扣系统	Unilin Click	







SPC地板分类

石纹系列		
基材 + 耐磨层厚度	4.5-8.0mm	
总厚度	5.5-9.5mm	
尺寸 (可定制)	英尺	mm
	24*12	610*305
静音垫	IXPE|1.0mm,1.5mm	
SPC 锁扣系统	Unilin Click	







SPC地板分类

- 提供全系列酒店配套装饰配件
- SPC墙板、踢脚线、楼梯扶手及过渡装饰条
- 统一的纹理与色彩搭配，确保酒店室内风格一致
- 为整栋酒店装修项目提供量身定制的解决方案

一站式定制酒店家具与设计服务



可定制尺寸、款式和材质

完整客房家具成套配套

可提供酒店 FF&E 项目
专项报价

地板、家具木纹花色可做
到同色配套

酒店与商业项目案例



公共休息区



酒店大堂



酒店客房

资质认证



EPHverifies符合权威行业标准，涵盖环境性能、耐用性及国际法规



符合欧盟CPR法规对建筑材料在安全、健康和环境保护方面的要求



FloorScore证明产品符合严格的室内空气质量标准，满足国际对挥发性有机物（VOC）排放和有害物质控制的环保要求




ISO 9001认证证明了国际公认的管理体系，实现了从设计到交付的全过程质量控制

资质认证

SGS认证证明我们的产品符合国际环境性能、安全和质量测试标准。

实现甲醛含量及重金属在限值内的零排放。

通过耐磨性（EN 660-2）和防火等级（EN 13501-1）等测试，确保产品的耐用性。

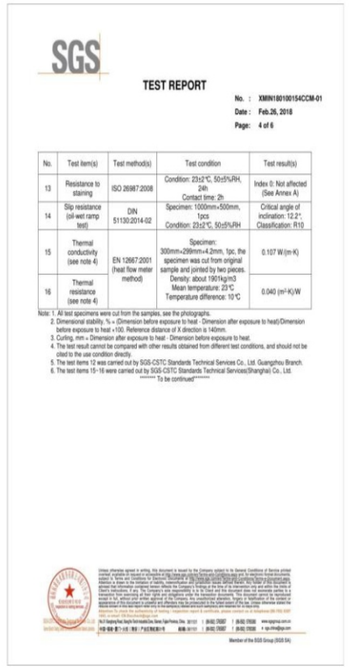

SGS

TEST REPORT


No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 4 of 6

No.	Test item(s)	Test method(s)	Test condition	Test result(s)
13	Resistance to staining	ISO 26987:2008	Condition: 23±2°C, 50±5%RH, 24h Contact time: 2h	Index 0: Not affected (See Annex A)
14	Slip resistance (oil-wet ramp test)	DIN 51130:2014-02	Specimen: 1000mm×500mm, 1pcs Condition: 23±2°C, 50±5%RH	Critical angle of inclination: 12.2°, Classification: R10
15	Thermal conductivity (see note 4)	EN 12667:2001 (heat flow meter method)	Specimen: 300mm×298mm×4.2mm, 1pc, the specimen was cut from original sample and jointed by two pieces. Density: about 1971kg/m3 Mean temperature: 23°C Temperature difference: 10°C	0.107 W/(m·K)
16	Thermal resistance (see note 4)			0.040 (m²·K)/W

Note: 1. All test specimens were cut from the samples, see the photographs.
2. Dimensional stability: % = (Dimension before exposure to heat - Dimension after exposure to heat)/Dimension before exposure to heat ×100. Reference distance of X direction is 140mm.
3. Curling, mm = Dimension after exposure to heat - Dimension before exposure to heat.
4. The test result cannot be compared with other results obtained from different test conditions, and should not be cited to the use condition directly.
5. The test items 12 was carried out by SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch.
6. The test items 15-16 were carried out by SGS-CSTC Standards Technical Services(Shanghai) Co., Ltd.

******* To be continued*******

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)

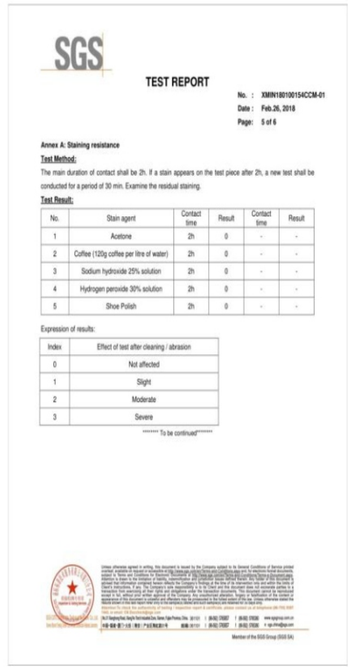

SGS

TEST REPORT

No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 5 of 6

Annex A: Staining resistance

Test Method:

The main duration of contact shall be 2h. If a stain appears on the test piece after 2h, a new test shall be conducted for a period of 30 min. Examine the residual staining.

Test Result:

No.	Stain agent	Contact time	Result	Contact time	Result
1	Acetone	2h	0	-	-
2	Coffee (120g coffee per litre of water)	2h	0	-	-
3	Sodium hydroxide 25% solution	2h	0	-	-
4	Hydrogen peroxide 30% solution	2h	0	-	-
5	Shoe Polish	2h	0	-	-

Expression of results:

Index	Effect of test after cleaning / abrasion
0	Not affected
1	Slight
2	Moderate
3	Severe

******* To be continued*******

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)



SGS

TEST REPORT

No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 6 of 6

Specimen photographs:

Orignal samples

Samples for Test item 15~16
(This surface contacts hot plate.)

Samples for Test item 15~16
(This surface contacts cold plate.)

SGS authenticate the photos on original report only
Note: This report is to supersede test report No. XMIN1801001154CCM.

*****End of report*****

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)



SGS

TEST REPORT

No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 1 of 6

CUSTOMER NAME: ZHEJIANG KINGDOM PLASTICS INDUSTRY CO., LTD.
ADDRESS: SOUTH ZONE CHEZI BRIDGE, HESHAN TOWN, TONGXIANG CITY, ZHEJIANG PROVINCE, CHINA

Sample Name : ESPC
Spec. : 4.2mm

Above information and sample(s) was/were submitted and confirmed by the client. SGS, however, assumes no responsibility to verify the accuracy, adequacy and completeness of the sample information provided by client.

****


Test Required : Selected test(s) as requested by applicant
SGS Ref. No. : GZIN1801003594CM, SHIN1801002677CCM, SLB1808190094STX
Date of Receipt : Jan.17, 2018
Testing Start Date : Jan.17, 2018
Testing End Date : Jan.30, 2018
Test result(s) : For further details, please refer to the following page(s)
(Unless otherwise stated the results shown in this test report refer only to the sample(s) tested)

******* To be continued*******

Signed for
SGS-CSTC Standards Technical Services Co., Ltd. XM Branch

Civi Huang Authorized Signatory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)

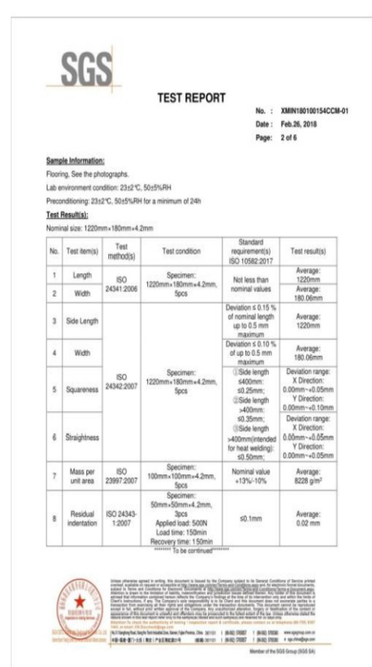

SGS

TEST REPORT

No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 2 of 6

Sample Information:

Flooring, See the photographs.
Lab environment condition: 23±2°C, 50±5%RH
Preconditioning: 23±2°C, 50±5%RH for a minimum of 24h


Test Result(s):

Nominal size: 1220mm×180mm×4.2mm

No.	Test item(s)	Test method(s)	Test condition	Standard requirement(s) ISO 10582:2017	Test result(s)
1	Length	ISO 24341:2006	Specimen: 1220mm×180mm×4.2mm, 5pcs	Not less than nominal values	Average: 1220mm
2	Width				Average: 180.06mm
3	Side Length			Deviation ≤ 0.15 % of nominal length up to 0.5 mm maximum	Average: 1220mm
4	Width			Deviation ≤ 0.10 % of up to 0.5 mm maximum	Average: 180.06mm
5	Squareness	ISO 24342:2007	Specimen: 1220mm×180mm×4.2mm, 5pcs	①Side length ≤400mm: ≤0.25mm; ①Side length >400mm: ≤0.35mm; ①Side length >400mm(intended for heat welding): ≤0.50mm;	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction: 0.00mm~+0.10mm
6	Straightness				Deviation range: X Direction: 0.00mm~+0.05mm Y Direction: 0.00mm~+0.05mm
7	Mass per unit area	ISO 23997:2007	Specimen: 100mm×100mm×4.2mm, 5pcs	Nominal value +13%/-10%	Average: 8228 g/m²
8	Residual indentation	ISO 24343-1:2007	Specimen: 50mm×50mm×4.2mm, 3pcs Applied load: 500N Load time: 150min Recovery time: 150min	≤0.1mm	Average: 0.02 mm

******* To be continued*******

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)

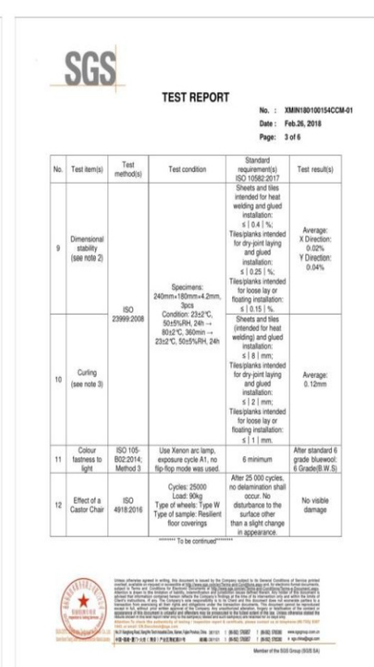

SGS

TEST REPORT

No. : XMIN1801001154CCM-01
Date : Feb.26, 2018
Page: 3 of 6

No.	Test item(s)	Test method(s)	Test condition	Standard requirement(s) ISO 10582:2017	Test result(s)
9	Dimensional stability (see note 2)	ISO 23999:2008	Specimens: 240mm×180mm×4.2mm, 3pcs Condition: 23±2°C, 50±5%RH, 24h → 80±2°C, 360mm → 23±2°C, 50±5%RH, 24h	Sheets and tiles intended for heat welding and glued installation: ≤	0.4	%; Tiles/planks intended for drop-joint laying and glued installation: ≤	0.25	%; Tiles/planks intended for loose lay or floating installation: ≤	0.15	%.	Average: X Direction: 0.02% Y Direction: 0.04%
10	Curling (see note 3)			Sheets and tiles (intended for heat welding) and glued installation: ≤	8	mm; Tiles/planks intended for dry-joint laying and glued installation: ≤	2	mm; Tiles/planks intended for loose lay or floating installation: ≤	1	mm.	Average: 0.12mm
11	Colour fastness to light	ISO 105-B02:2014, Method 3	Use Xenon arc lamp, exposure cycle A1, no flip-flop mode was used.	6 minimum	After standard 6 grade bluewool: 6 Grade(B.W.S)
12	Effect of a Castor Chair	ISO 4918:2016	Cycles: 25000 Load: 90kg Type of wheels: Type W Type of sample: Resilient floor coverings	After 25 000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in appearance.	No visible damage

******* To be continued*******

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms_and_conditions_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exempt the parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 www.sgsgroup.com.cn
中国·广东·广州·经济技术开发区东区东骏路1号 邮编: 510730 t (86-20) 2268 7555 f (86-20) 2268 7500 e sgs.china@sgs.com
Member of the SGS Group (SGS SA)


艺术拼花

• 艺术肌理

打破常规排列，让每一步都踏在精工细作的几何美学之上。

橡木/黑桃木

01、人字拼

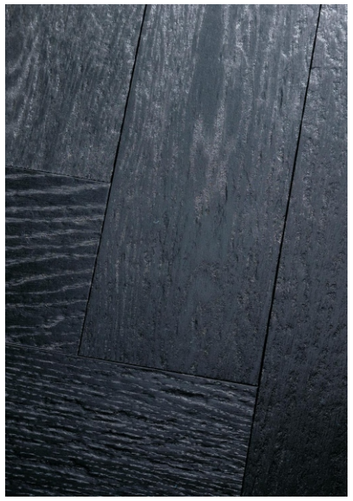





02、鱼骨拼





03、高定拼花






户外塑木

- **无惧风雨，岁月留痕。**

  环保无味，防腐防潮，将自然质感延伸至户外庭院。



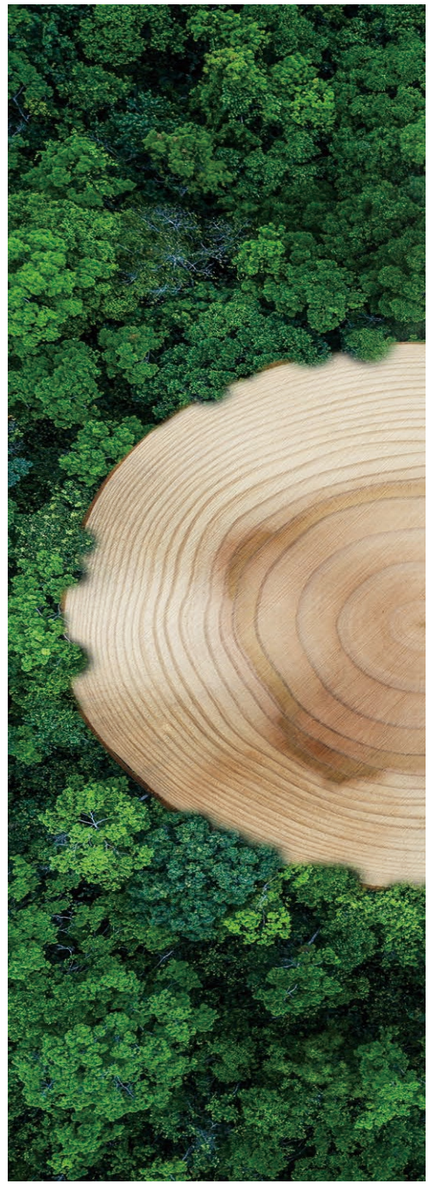

地板






黑色



咖啡色



灰色




柚木色



红木色

共挤木塑

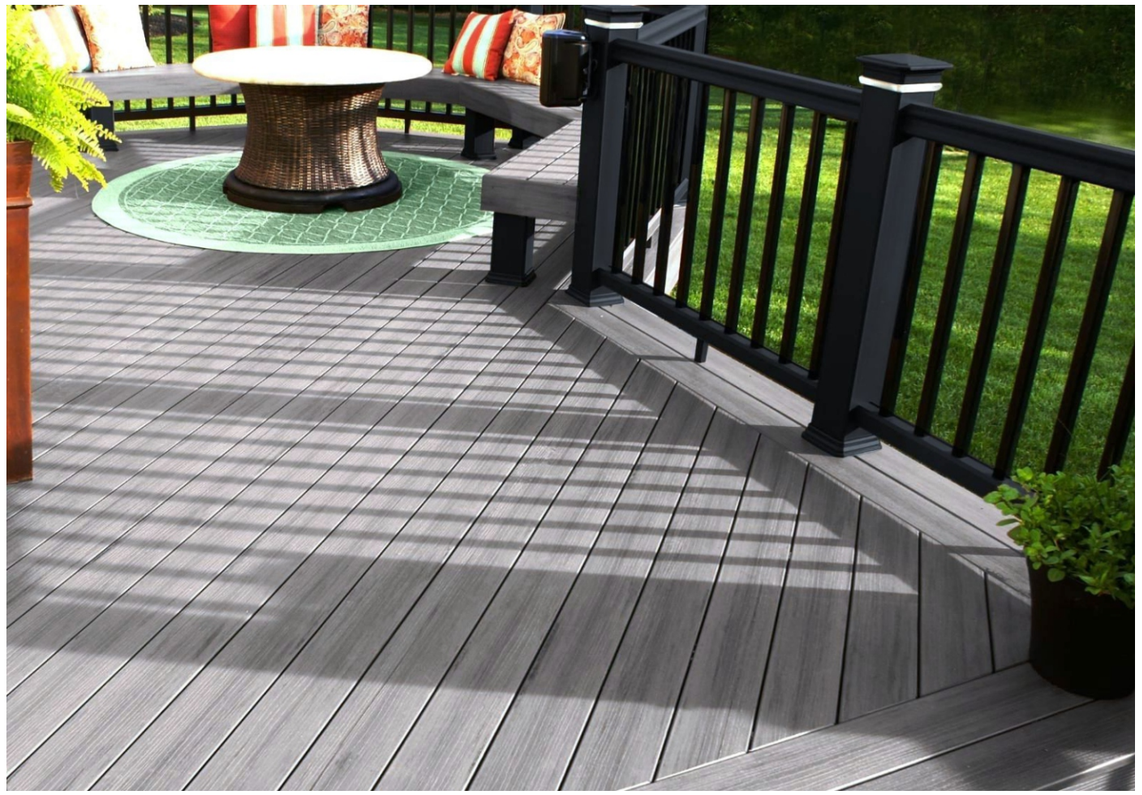



银色浅胡桃木柚木灰色 灰色

红色古枫木

红色檀木

封边条




卡扣和螺丝


◆ 第一代 43mm×43mm




◆ 第二代 60mm X 40mm

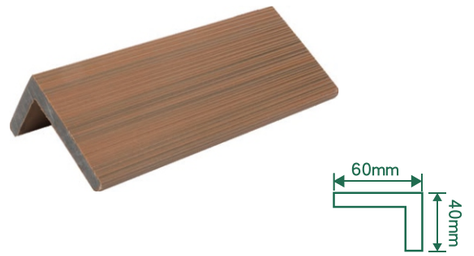


◆ 第二代 48mm X 48mm

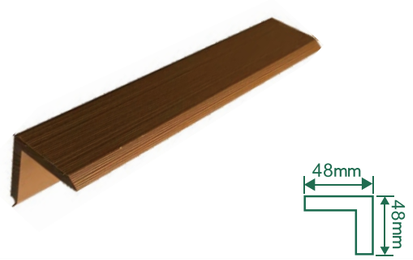

◆ 第二代 76mm X49.25mm

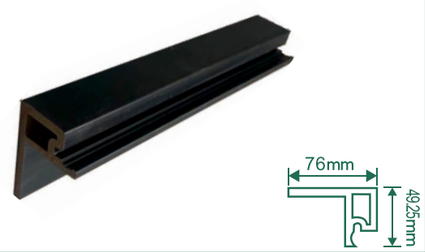

WPC
围栏

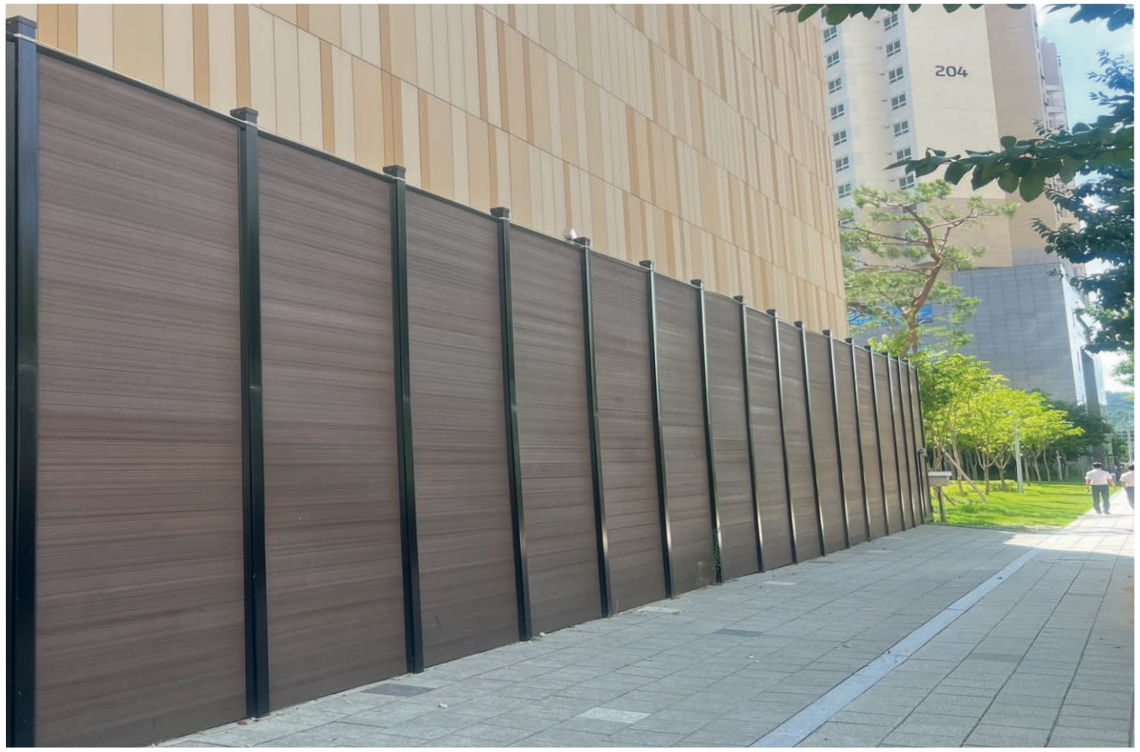

封闭式围栏

J13 1.8m×1.8m



◆ GJ13 1.8m×1.8m



半封闭式围栏

GJ13 和 GJ23 1.8m×1.8m




镂空式围栏

◆ GJ23 1.8m×1.8m



◆ GJ13 195mm×20mm

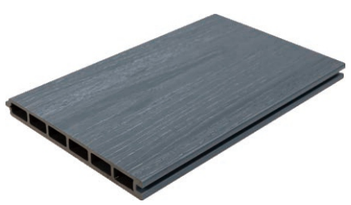


◆ GJ23 90mm×20mm





铝制底座

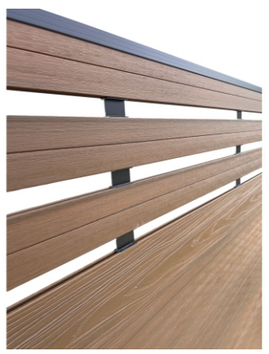

间隔件

WPC大门

◆ / 电动大门



◆ / 普通大门



◆ / 普通大门



墙面覆层




墙面覆层可为您的墙面打造全新外观，使其更贴合自然环境。墙面覆层可保护您的墙面免受风化和阳光照射，让您安心无忧。




◆ AM26–3D 压纹

145毫米X20.5毫米

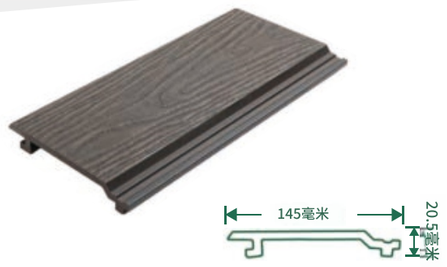

◆ GJ05

156毫米 X 21毫米



拼接地板





DIY 拼接地板

使用我们创新的环保 WPC DIY 用品，打造您的阳台、花园和庭院。产品环保且安全有保障，安装方便。

产品：DIY 拼接地板
型材尺寸：300 * 300 * 22mm

WPC DIY 用品由可快速轻松卡接在一起的拼接地板组成。
打造美观、整洁且专业的外观
让您引以为豪。

◆ LYW-01 300×300×22mm



◆ LYW-02 600×300×22mm



◆ LYW-03 300×300×22mm



◆ LYW-04 300×300×22mm



◆ LYW-05 300×300×22mm



◆ LYW-06 300×300×22mm



第三章

空间灵魂

Space Soul

——家具系统——

纯粹基底，坚韧内核





现代极简高定（沙发/餐桌/休闲椅）

●极简线条，重塑秩序。

以几何切割空间，用高级皮质与大理解构奢华的定义。



■ 摒弃浮夸的装饰符号，专注轮廓、比例与材质本身。沙发承载松弛的居家感受，餐桌构建相聚的场景，休闲椅安放独处时光。一套完整的家具体系，用统一的极简语言，让空间形成连贯的视觉秩序，适配私宅、酒店与商业会所等多种高端场景。



新中式与高定木质（柜体/书架/茶桌）

一木成器，留白艺术。

北美黑胡桃搭配手工锤纹，于喧嚣中筑就东方禅意。



百年成材，方敢入室。

每一块木料都有来处与年轮，

我们只挑时间沉淀过的纹理。





木有温度，家有故事。

把时间交给木，把家交给你。

功能座椅（电竞/办公/休闲）

一木成器，留白艺术。

北美黑胡桃搭配手工锤纹，于喧嚣中筑就东方禅意。





LK-1058











LK-3067T

电竞椅不是装备，而是并肩的队友 ——

支撑每一次极限操作，

也接住每一场酣畅之后的疲惫。

每一把座椅，都是对身体的尊重，也是对生活的认真。



LK-3055H

高定木质

- **不修饰的木，不伪装的美。**

保留原生纹理，以木蜡油温润触感，还原自然本真。



【 橡木 】



N°29

山核桃 / 轮廓边柜

1200*400*720mm

化变| 平面拉丝| 木蜡油

空间的《留白艺术》

Art of Spatial Blankness



第四章

门

Door

门系列

作为空间转换的媒介



钢制门



RBO 25001



RBO-25015



RBO-25002



RBO-25016

铸造铝门系列



RBO-25038



RBO-25039



RBO-25040

模压门系列



RBO-25115



RBO-25116

玻璃门系列



RBO-25123



RBO-25124



RBO-25125



RBO-25126

木质钢制门



RBO-25067



RBO-25068



RBO-25069



RBO-25070

第五章

厨房艺术

Culinary art

——锅具系列——

人间烟火，亦有诗意



锅具系列

烟火里的艺术。

陶瓷涂层丝滑不粘，用治愈色彩点亮厨房，让烹饪成为一场美学演绎。









爱与美食，皆不可辜负。

我们把对生活的热爱，

一寸一寸，做进厨房里。

餐厨用品精选

从标准单品到空间配套的全球供应链整合







